



EC105LS

EC105LS designed to maximize the thermal performance, door size and weight (Up to 400kg per panel). The lift & slide door is the ultimate sliding system for your needs. It allows greater connection between the inside living space and outside nature. It creates generous openings and allows maximum transparency and light penetrations.


Thermally broken systems have been designed for improved energy efficiency. Our commitment to environmentally sustainable window solutions delivers you greater comfort of living and increased savings in your heating and cooling costs.

Energy Rating WERS


GLAZING	U	SHGC
6mm Clear Toughened / 12mm Argon / 6mm Clear Toughened	2.9	0.55
6mm Energy Tech / 12mm Argon / 6mm Clear Toughened	2.3	0.48
6mm Performa Tech / 12mm Argon / 6mm Clear Toughened (Grey)	2.1	0.25
6mm Sunergy Clear / 12mm Argon / 6mm Clear Toughened	2.5	0.40
6.38mm Clear Comfort Plus / 12mm Argon / 6mm Clear Toughened	2.3	0.47
6mm LightBridge / 12mm Argon / 6mm Clear Toughened	2.2	0.56
6mm Energytech / 12mm Argon / 6mm Clear / 12mm Air	1.9	0.43

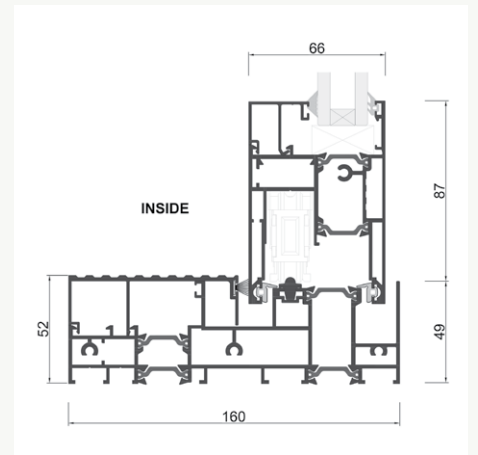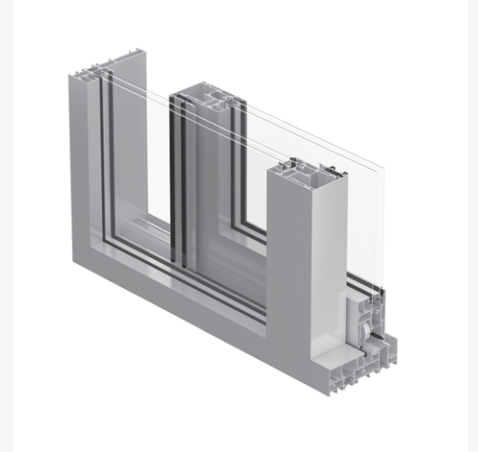

Opening Styles



SLIDING DOOR



BI-PARTING DOOR

Max Panel Width	2000
Max Panel Height	3000
Max Panel Weight	400kg
Track Options	1

Windows for meaningful living.

15 Kelletts Road
Rowville VIC Australia 3178
P +61 3 9763 1089
windows@thermeco.com.au
thermeco.com.au

