EC 400 FL

thermally broken commercial
flush glazing system for
superior energy efficiency

Thermeco

Window systems for better living.

17733_Thermeco_ProductSheets_EC_400FL_030615.indd 1 3/06/2015 4:26 pm

EC400FL

The EC400 flush line is a very versatile and flexible thermally-broken commercial system that is ideal for shopfronts and low-rise curtain wall applications. It features straight cuts, flush glazing and self-draining sub-sill that is easy to fabricate and easy to install.

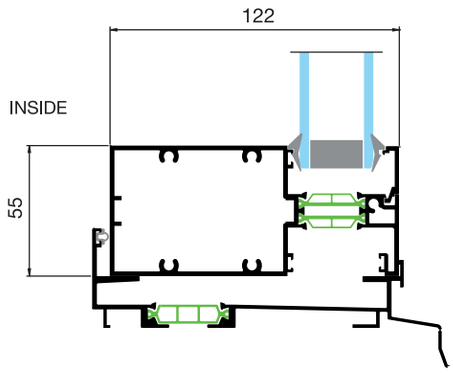

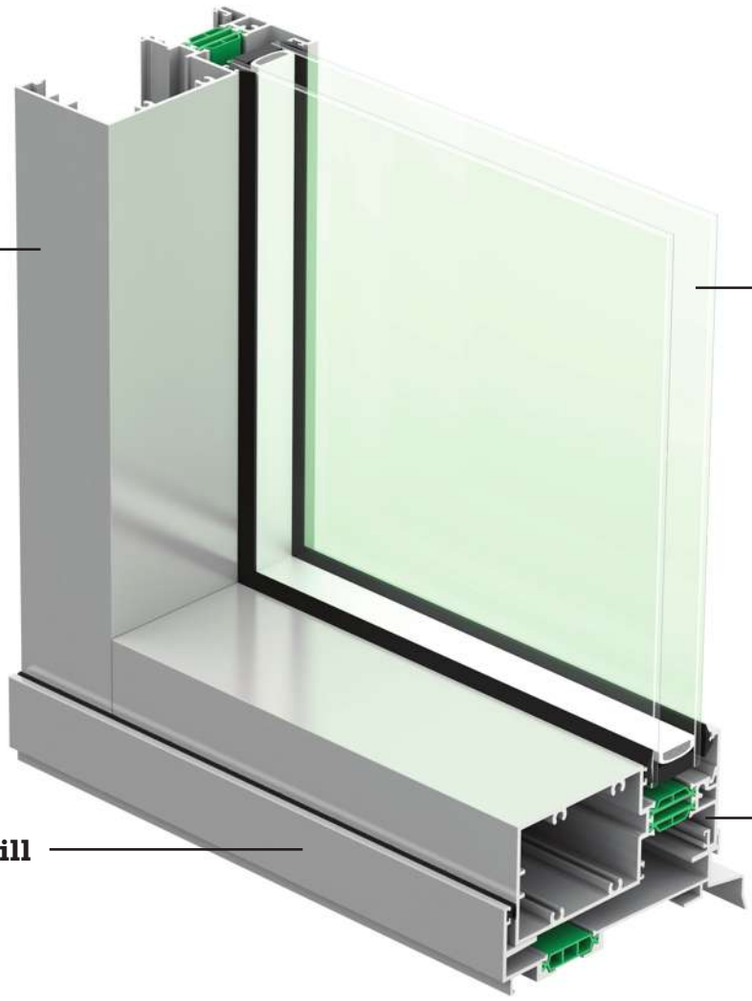

Frame

Sub-Sill

Single, Double or Triple Glazing
Excellent thermal & acoustic insulation available in a range of up to 51.7mm thicknesses to suit installation requirement.

Thermal Break
34mm extra wide insulating thermal strips for ultimate frame thermal performance.

Opening Styles



Fixed

Hinged Doors



Top Hung Sliding

Awning

Casement

Features & Benefits

- Low maintenance
- Maximum wind and water tightness
- Efficient thermal insulation
- Energy savings
- High acoustic insulation
- Dual coloured profiles

Energy Rating WERS

Glazing	Uw	SHGC
6mm Clear Toughened / 18mm Argon / 6mm Clear Toughened	2.8	0.63
6.38mm Clear Lam / 20mm Argon / 6.38mm Clear Lam	2.7	0.62
6mm Sunergy Clear / 18mm Argon /6mm Clear Toughened	2.2	0.45
6mm Energy Tech / 18mm Argon / 6mm Clear Toughened	2	0.55
6mm Energy Advantage / 20mm Argon / 6mm Clear Toughened	2.1	0.5
6mm Insulmax 564 / 12mm Argon / 6mm Clear Toughened	1.7	0.25

Design & Build: Modscape

A look into world class windows.

Design: John Demos Architect | Build: Stevaugh Constructions

Design & Build: Modscape

Design: Inarc Architects | Build: Len Bogatin Associates

Authorised Fabricator

Thermeco

Window systems for better living.

15 Kelletts Road, Rowville
3178, Victoria, Australia
Phone: 03 9763 1089
Fax: 03 9923 6263
windows@thermeco.com.au

Members of: